

**WORLD INTELLECTUAL PROPERTY  
ORGANIZATION**

世界知识产权组织

**ORGANIZACION MUNDIAL  
DE LA PROPIEDAD INTELECTUAL**



**ORGANISATION MONDIALE  
DE LA PROPRIÉTÉ INTELLECTUELLE**

المنظمة العالمية للملكية الفكرية

**ВСЕМИРНАЯ ОРГАНИЗАЦИЯ  
ИНТЕЛЛЕКТУАЛЬНОЙ СОБСТВЕННОСТИ**


**CERTIFICATION**

It is hereby certified that the attached copy is a true copy of the pamphlet of international application PCT/KR2000/00116, filed with the Korean International Patent Office as receiving Office on 14 February 2000 (14.02.2000), which was published on 22 February 2001 (22.02.2001) under International Publication No. WO 01/13346.

By: The International Bureau

A handwritten signature in black ink, appearing to read 'Bert BEIJER', is written over a circular stamp.

Bert BEIJER  
Head  
PCT Processing Section II  
PCT Operations Division



Date: 3 August 2005 (03.08.2005)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
22 February 2001 (22.02.2001)

PCT

(10) International Publication Number  
**WO 01/13346 A1**

- (51) International Patent Classification<sup>7</sup>: **G08B 13/194** (74) Agent: **KIM, Won, Ho**; Teheran Building, 825-33, Yok-sam-dong, Kangnam-ku, Seoul 135-080 (KR).
- (21) International Application Number: **PCT/KR00/00116** (81) Designated States (*national*): AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GD, GE, HR, HU, ID, IL, IN, IS, JP, KP, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, SL, TR, TT, UA, US, UZ, VN, YU.
- (22) International Filing Date: 14 February 2000 (14.02.2000)
- (25) Filing Language: English (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (26) Publication Language: English
- (30) Priority Data:  
1999/33924 17 August 1999 (17.08.1999) KR
- (71) Applicant (*for all designated States except US*): **WEB-GATE INC.** [KR/KR]; 7 floor, ASIC Venture Boulevard, 1330-3, Secocho-dong, Seocho-ku, Seoul 137-070 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **HONG, Geun-Sun** [KR/KR]; 201 Sammi Villa Ka-dong, 4/3 Wooman-dong, 136-1, Paldal-ku, Suwon-city, Kyungki-do 442-190 (KR).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SURVEILLANCE CAMERA AND SURVEILLANCE CAMERA IMAGE PROCESSING METHOD

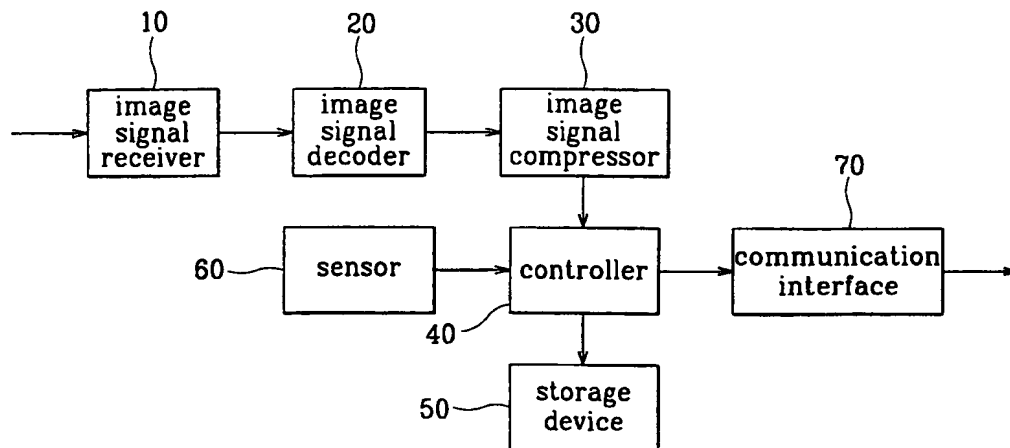

(57) Abstract: The present invention related to a surveillance monitoring camera which comprises an image signal receiver (10) receiving image signals and converting the image signals into electrical image signals and outputting the electrical image signals, an image signal decoder (20) converting the electrical image signals output from the image signal receiver (10) into digital signals and outputting the digital signals, an image signal compressor (30) compressing the digital signals output from the image signal decoder (20) and outputting the compressed digital image signals, a storage device (50) storing the compressed digital image signals from the image signal compressor (30), a controller (40) controlling the conversion, compression, and storing of the image signals, a sensor (60) which detects a change in conditions input from the image signal receiver (10) or from external conditions, and a communication interface (70) which receives and transmits the image signals stored in the storage device (50) and information on the movement and operation of the camera to/from a site remote from the camera according to the operation of the controller (40).

## Surveillance Camera and Surveillance Camera Image Processing Method

### BACKGROUND OF THE INVENTION

#### (a) Field of the Invention

5       The present invention relates to a surveillance monitoring camera and an image processing method of the monitoring camera. More specifically, the present invention relates to a surveillance monitoring camera which automatically stores an image signal and an image processing method of the monitoring camera.

#### 10 (b) Description of the Related Art

A surveillance monitoring camera takes photographs of places where security or a guard is necessary in banks or public office buildings so that security or guarding is easily performed remotely.

15       The conventional surveillance monitoring camera system comprises a camera, a storage device that stores taken images, and a display device. Image transmission between the camera and the display device is performed by wire and in real-time, and once an image is displayed, the image disappears. Therefore, in order to store the image signal, a storage device for the image signal is necessary. A video cassette recorder (VCR) is chiefly used as such a  
20 storage device, and video tape is used as the storage media.

However, the conventional surveillance monitoring camera system has following problems.

25       As the camera is far from the storage device and since transmission lines are used to transmit the image signals in a conventional surveillance monitoring camera, the transmission lines, the storage device, and the storage media can easily be damaged by a person who desires to disable the camera system.

30       Since the monitoring camera does not have a built-in image signal storage device, in order to display image signals taken by the camera after the images are photographed, an additional image signal storage device is needed.

Since a central image signal storage device stores image signals

transmitted from a plurality of monitoring cameras in a conventional monitoring camera system, it is difficult to store all the image signals taken by all of the cameras. Therefore, in order to store all the image signals, each camera needs to have an image signal storage device.

5        Since the conventional surveillance camera system converts the image signal into an analog signal to be stored, it is difficult to configure a monitoring system that concurrently monitors in multiple locations.

### **SUMMARY OF THE INVENTION**

10        It is an object of the present invention to provide a surveillance monitoring camera with a built-in image signal storing device and an image processing method of the monitoring camera.

      In one aspect of the present invention, a monitoring camera comprises an image signal receiver receiving image signals and converting the image signals into electrical image signals and outputting the electrical image signals;  
15    an image signal decoder converting the electrical image signals output from the image signal receiver into digital signals and outputting the digital signals; an image signal compressor compressing the digital signals output from the image signal decoder and outputting the compressed digital image signals; a storage device storing the compressed digital image signals from the image signal  
20    compressor; and a controller controlling the conversion, compression, and storing of the image signals.

      The camera further comprises a sensor that detects a change of conditions input from the image signal receiver or from external conditions.

      The camera further comprises a communication interface that receives  
25    and transmits the image signals stored in the storage device and information on the movement and operation of the camera to/from a place remote from the camera according to the operation of the controller.

      In other aspect of the present invention, an image processing method of a monitoring camera that receives image signals and converts the image signals  
30    into digital image signals comprises the steps of (a) receiving the image signals and converting the image signals into electrical image signals; (b) converting the electrical image signals into digital image signals; (c) compressing the digital

image signals; and (d) storing the compressed digital image signals in a storage device built into the monitoring camera.

The step (d) further comprises steps of (e) receiving the image signals only when a change in the conditions of the image or of external conditions is detected by a sensor; and (f) receiving and transmitting the image signals stored in the storage device and conditions and instructions of the operation of the monitoring camera from/to a place remote from the camera.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate an embodiment of the invention, and, together with the description, serve to explain the principles of the invention:

FIG. 1 is a block diagram of a surveillance monitoring camera according to a preferred embodiment of the present invention; and

FIG. 2 is a flow chart of a surveillance monitoring camera according to a preferred embodiment of the present invention.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

In the following detailed description, only the preferred embodiment of the invention has been shown and described, simply by way of illustration of the best mode contemplated by the inventor(s) of carrying out the invention. As will be realized, the invention is capable of modification in various obvious respects, all without departing from the invention. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not restrictive.

FIG. 1 shows a block diagram of a monitoring camera according to a preferred embodiment of the present invention.

The monitoring camera comprises an image signal receiver 10, an image signal decoder 20, an image signal compressor 30, a controller 40, a storage device 50, a sensor 60, and a communication interface 70. The image signal decoder 20 is coupled to the image signal receiver 10, the image signal compressor 30 is coupled to the image signal decoder 20, the controller 40 is coupled to the image signal compressor 30, the sensor 60 is coupled to the controller 40, the storage device 50 is coupled to the controller 40, and the

communication interface 70 is coupled to the controller 40 and to the outside.

An operation of the monitoring camera and an image processing method of the monitoring camera will now be described referring to drawings.

The image signal receiver 10 receives image signals, that is, optical  
5 signals, and converts the optical signals into electrical signals to be output to the image signal decoder 20 in step S10. The output electrical signals are analog signals. A device that converts the optical signals into electrical signals, such as a charge coupled device (CCD), is used as the image signal receiver 10.

The image signal decoder 20 receives the analog electrical image  
10 signals from the image signal receiver 10 and converts them into digital signals in step S20.

The image signal compressor 30 compresses the digital signals output from the image signal decoder 20 using an image compression method in step S30. The image signal compression methods include a wavelet method, a joint  
15 photographic coding experts group (JPEG) method, a moving picture experts group (MPEG) method, and a fractal conversion method. The reason for compressing the digital image signals is to reduce the amount of data that the digital image signals and to improve the usage efficiency of the storage device 50 in the camera.

20 The storage device 50 is installed in the monitoring camera and stores the digital data compressed in the image signal compressor 30 in step S40. Since the storage device 50 is built into the camera, it is not necessary to install an external storage device such as the VCR. A hard disk drive (HDD), a compact disc recorder (CDR), a mini disk (MD), or a memory card can also be used as  
25 the storage device. When using the above-noted devices, the total volume of the camera does not greatly increase. Therefore, even when a problem occurs in the monitoring camera or the central managing system so that the image signals cannot be transmitted in real-time, since the image signals are stored in the storage device 50 in the camera, images taken during the malfunction of the  
30 system can still be displayed.

The sensor 60 checks the conditions of the places of which the pictures are taken. It is not efficient for the camera to continuously take photographs and

store the image signals. Hence, the sensor 60 detects movements of physical objects in those places which are under surveillance and reports the detection results to the controller 40. The controller 40 allows the camera to operate only when the sensor 60 detects the movements of physical objects.

5       The controller 40 controls the conversion operation of the image signals of the image signal receiver 10 into the electrical signals, conversion operation of the signals of the image signal decoder 20 into the digital signals, and compression operation of the image signal compressor 30. Additionally, according to the information on areas under surveillance detected by the sensor  
10 60, the controller 40 determines whether to store and receive the image signals provided to the image signal receiver 10, and controls the operation of the camera as well as the operation of receiving and transmitting the image signals taken by the camera through the communication interface 70.

      Since the surveillance monitoring camera of the present embodiment  
15 comprises a built-in storage device and a controller, it is easy for each camera to have a set time, interval, and conditions for the storage of the image signals.

      The communication interface 70, that is, a central managing device for the control of the operations of each camera, transmits information on the operations of the surveillance monitoring camera and image signals taken by the  
20 camera. Therefore, a person who manages the monitoring camera can always check for any malfunction of the camera or a communication failure. The monitoring camera can be connected to a local-area network (LAN) or a wide-area network (WAN) through an Ethernet system, a modulator/demodulator (MODEM), or a radio frequency (RF) transceiver. Since the monitoring camera  
25 converts the image signals taken into digital image signals and compresses and stores the digital signals, it is easy to transmit and receive the image signals and to configure a network system for managing multiple monitoring cameras.

      While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to  
30 be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

**WHAT IS CLAIMED IS:**

1. A surveillance monitoring camera, comprising:

an image signal receiver receiving image signals and converting the image signals into electrical image signals and outputting the electrical image signals;

an image signal decoder converting the electrical image signals output from the image signal receiver into digital signals and outputting the digital signals;

an image signal compressor compressing the digital signals output from the image signal decoder and outputting the compressed digital image signals;

a storage device storing the compressed digital image signals from the image signal compressor; and

a controller controlling the conversion, compression, and storing of the image signals.

2. The camera of claim 1, wherein the camera further comprises a sensor that detects a change in conditions input from the image signal receiver or from external conditions.

3. The camera of claim 2, wherein the camera further comprises a communication interface which receives and transmits the image signals stored in the storage device and information on movement and operation of the camera to/from a site remote from the camera according to operations of the controller.

4. An image processing method of a surveillance monitoring camera that receives image signals and converts the image signals into digital image signals, comprising the steps of:

(a) receiving the image signals and converting the image signals into electrical image signals;

(b) converting the electrical image signals into the digital image signals;

(c) compressing the digital image signals; and

(d) storing the compressed digital image signals in a storage device built into the surveillance monitoring camera.

5. The method of claim 4, wherein the step (d) further comprises a step of (e) receiving the image signals only when a change in conditions of the image



7  
or external conditions is detected by a sensor.

6. The method of claim 4, wherein the step (d) further comprises a step of (f) receiving and transmitting the image signals stored in the storage device and conditions and instructions of the operation of the monitoring camera from/to  
5 a site remote from the camera.

1/1

FIG. 1


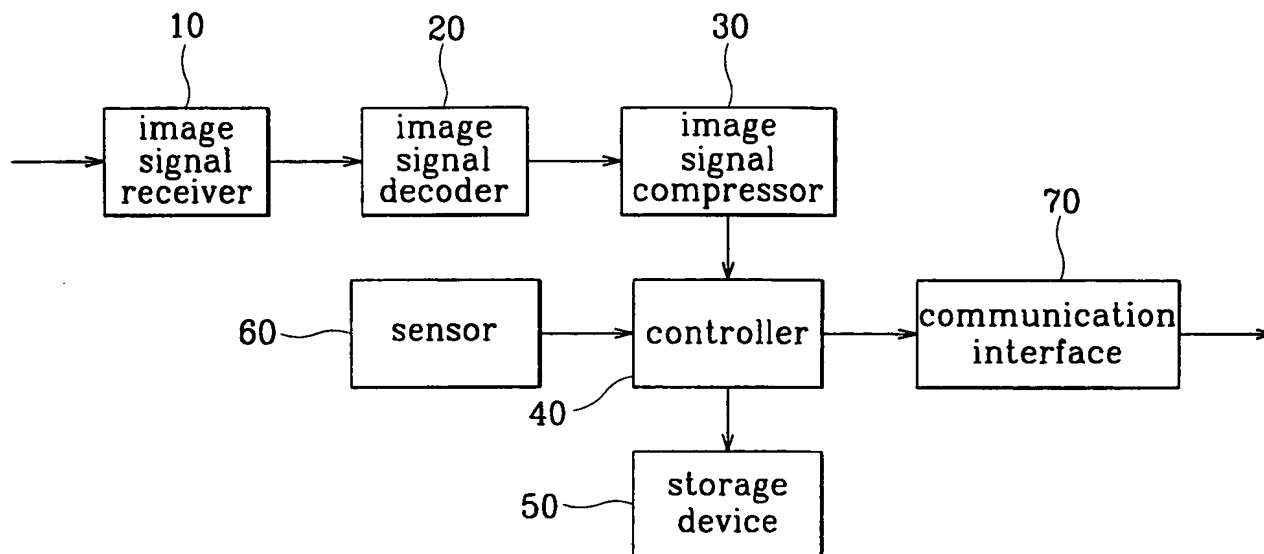


FIG. 2

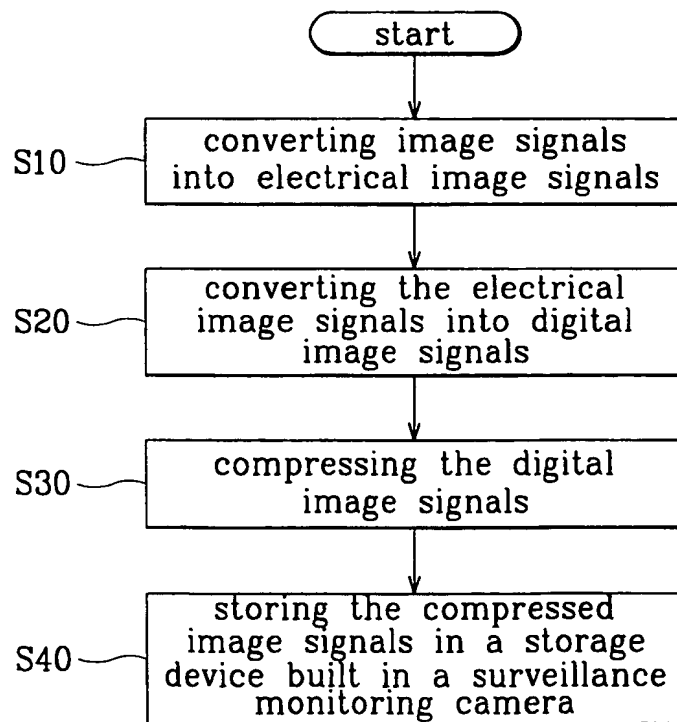

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 00/00116

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: G 08 B 13/194

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: G 08 B 13/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98/11714 A2 (TVX, INC.) 19 March 1998 (19.03.98) abstract; claims; fig.	1-6
X	JP 8317376 (MAITECH KK) 29 November 1996 (29.11.96) (abstract). [online][retrieved on 31 March 2000 (31.03.00)]. Retrieved from EPO PAJ Database.	1,2,4,5
P,X	EP 0961493 A2 (NILES PARTS CO., LTD.) 1 December 1999 (01.12.99) abstract; fig.1.	1,2,4,5
A	DE 4110649 A1 (TELENORMA GMBH) 22 October 1992 (22.10.92) abstract; claims; fig.1.	1-6
A	GB 2260880 A (MOTOROLA LIMITED) 28 April 1993 (28.04.93) abstract; fig.	1-6
A	DE 4339075 A1 (DALLMEIER) 18 May 1995 (18.05.95) claims; fig.1.	1
----		

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not  
considered to be of particular relevance

„E“ earlier application or patent but published on or after the international  
filing date

„L“ document which may throw doubts on priority claim(s) or which is  
cited to establish the publication date of another citation or other  
special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other  
means

„P“ document published prior to the international filing date but later than  
the priority date claimed

„T“ later document published after the international filing date or priority  
date and not in conflict with the application but cited to understand  
the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be  
considered novel or cannot be considered to involve an inventive step  
when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be  
considered to involve an inventive step when the document is  
combined with one or more other such documents, such combination  
being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

31 March 2000 (31.03.2000)

Date of mailing of the international search report

11 August 2000 (11.08.2000)

Name and mailing address of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

Fellner

Telephone No. 1/53424/345

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/KR 00/00116

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
DE	A1	4110649	22-10-1992	DE	C0	59207502	12-12-1996
DE	C2	4110649	08-04-1993	EP	A1	578671	19-01-1994
				EP	B1	578671	06-11-1996
				JP	T2	6506079	07-07-1994
				WO	A1	9217865	15-10-1992
DE	A1	4339075	18-05-1995			none	
DE	C2	4339075	24-07-1997				
EP	A2	961493	01-12-1999	JP	A2	11341477	10-12-1999
GB	A1	2260880	28-04-1993	GB	A0	9122606	04-12-1991
GB	B2	2260880	24-05-1995				
JP	A	8317376				none	
WO	A2	9811714	19-03-1998	AU	A1	43500/97	02-04-1998
WO	A3	9811714	09-07-1998				

# PATENT COOPERATION TREATY

## PCT

**COMMUNICATION IN CASES FOR WHICH  
NO OTHER FORM IS APPLICABLE**

From the INTERNATIONAL BUREAU

To:

WERK Linda J  
Fulbright & Jaworski L.L.P  
555 South Flower Street  
Forty-First Floor  
Los Angeles, CA 90071  
United States of America

Date of mailing ( <i>day/month/year</i> ) 12 August 2005 (12.08.2005)	
Applicant's or agent's file reference OPP990618KR	<b>REPLY DUE</b> see paragraph 1 below
International application No. PCT/KR2000/000116	International filing date ( <i>day/month/year</i> ) 14 February 2000 (14.02.2000)
Applicant <div style="text-align: center;">WEBGATE INC.</div>	

1. <input type="checkbox"/> REPLY DUE within _____ months/days from the above date of mailing <input type="checkbox"/> NO REPLY DUE, however, see below <input checked="" type="checkbox"/> IMPORTANT COMMUNICATION <input type="checkbox"/> INFORMATION ONLY  2. COMMUNICATION:	<div style="text-align: right;"> <b>FULBRIGHT &amp; JAWORSKI, LLP</b>  <b>PCT DOCKETING</b>          Docketed <input type="checkbox"/> Not Req'd <input checked="" type="checkbox"/> Confirmation <input type="checkbox"/>          Initials 1st <u>  a  </u> Initials 2nd _____  <div style="text-align: center;">AUG 25 2005</div>         Attorney <u>  DMM  </u>          Docket No. _____          Action Req'd _____ Date Due _____       </div> <p><b>With reference to your fax message of 25 July 2005 concerning the request for the certified copy of the PCT international publication, WO 01/13346.</b></p> <p><b>We are sending the certified copy of publication and will send the bill in separate mail as to you soon as possible.</b></p>
---	---

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No. +41 22 338 7090	Authorized officer <div style="text-align: center;">Kinam HA</div> Telephone No. (41-22) 338.80.31
--	--